



Technical Data

WLK 4 – WLK 6 S

WLK 4 – WLK 8

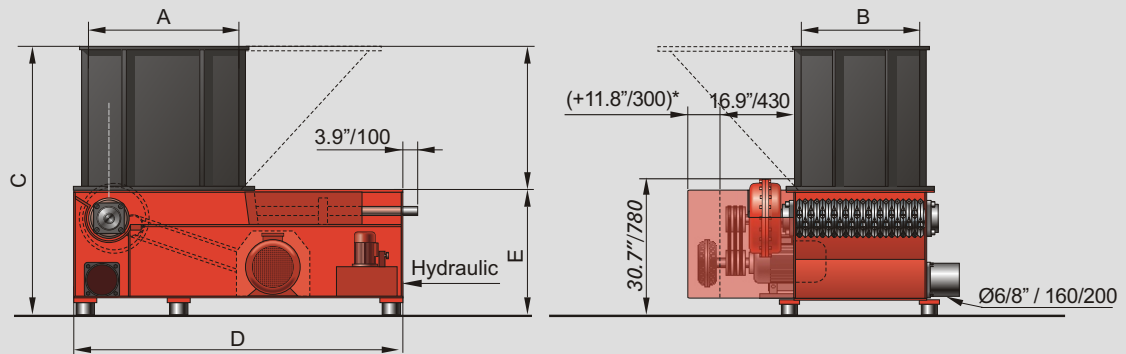

WLK 4 S – WLK 6 S

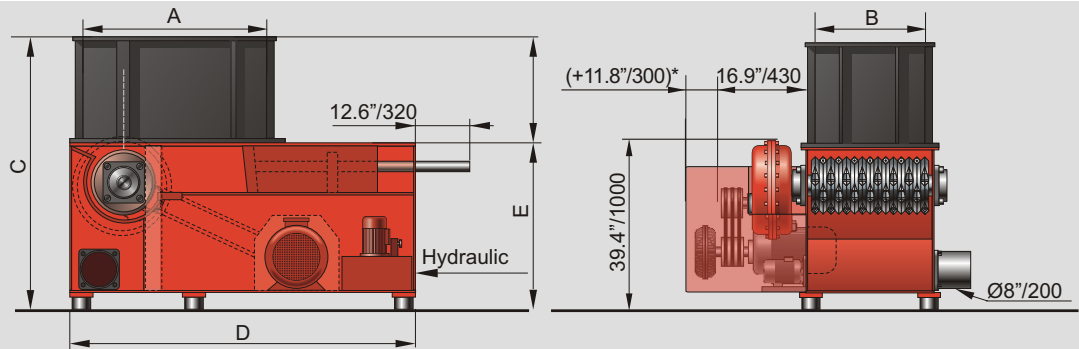

	WLK 4	WLK 4 S	WLK 8	WLK 6 S
Hopper opening in./mm):	23.6x31.5 / 600/800	23.6x35.4 / 600x900	39.4x39.4 / 1,000x1,000	31.5x47.2 / 800x1,200
Hopper volume (yd ³ / m ³):	0.8 / 0.6	0.9 / 0.7	1.75 / 1.3	1.3 / 1.0
Throughput:	The throughput rate depends on material and screen size from 3/8"-2" (10-50 mm)			
Rotor diameter (in./mm):	10 / 252	14.5 / 368	10 / 252	14.5 / 368
Rotor length (inch/mm):	23.6 / 600	23.6 / 600	39.4 / 1,000	31.5 / 800
Rotor speed (rpm):	60 - 100	60 - 100	80 - 120	60 - 100
Power (hp/kW):	20/25 / 15/18.5	25/30 / 18.5/22	30/40 / 22/30 *	40/50 / 30/37 *
Rotor knives:	14	28	24	42
Connection - Ø (inch/mm):	6 / 160	8 / 200	8 / 200	8 / 200
Air speed (cfm, m/sec	1,300 / 28	1,900 / 28	1,900 / 28	1,900 / 28
Weight (approx. Lbs/kg):	2,900 / 1,300	3,800 / 1,700	3,500 / 1,600	4,400 / 2,000
A (inch/mm):	31.5 / 800	35.4 / 900	39.4 / 1,000	47.2 / 1,200
B (inch/mm):	23.6 / 600	23.6 / 600	39.4 / 1,000	31.5 / 800
C (inch/mm):	64.6 / 1,640	70.6 / 1,795	64.5 / 1,640	77.9 / 1,980
D (inch/mm):	70.9 / 1,800	74.8 / 1,900	78.7 / 2,000	82.6 / 2,100
E (inch/mm):	29.1 / 740	35.4 / 900	29.1 / 740	43.3 / 1,100

* > 30 hp (22 kW) with hydrocentrifugal clutch. PLC available upon request. Special configurations are available. Call for details.

Demonstrations and tests with your materials are possible in our technical facility by appointment.

WEIMA America, Inc.

3678 Center Circle
Fort Mill, SC 29715

Phone: 803-802-7170

Fax: 803-802-7098

Internet: www.weimaamerica.com

E-mail: info@weimaamerica.com



With locations in

Ilsfeld, Germany

Ternberg, Austria

Northants, Great Britain

La Ferte s. Jouarre, France

and more than

50 sales offices worldwide!

Advanced technology for size reduction